


“SUBSTATION” STYLE TRANSFORMER WITH THE FOLLOWING FEATURES:

- Primary Voltage range from 2400V to 14,400V
- Secondary Voltage: 480V
- Wye-Wye or Delta-Wye configurations
- No load tap changer
- Fully rated, no need for external power for cooling fans
- CUL US Listed
- Available with short 24' step deck trailer (optional)

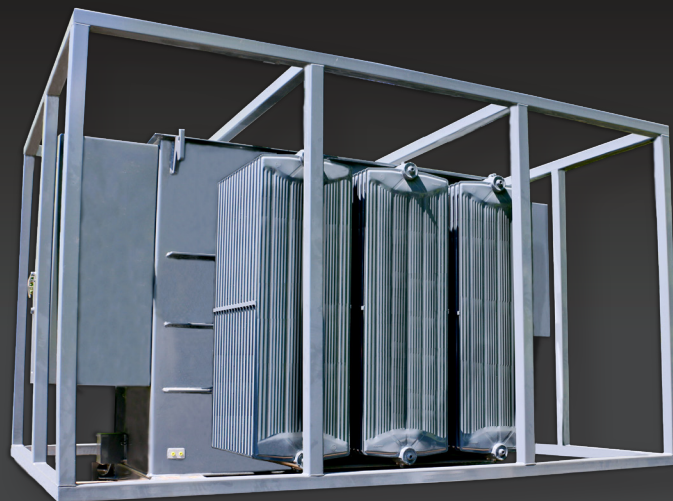

APPLICATIONS:

- Load testing at medium voltages
- Temporary power generation
- Temporary transformer replacement

TRANSFORMER DETAILS:

- Non-PCB Mineral Oil
- Forklift pockets
- Lifting hooks
- Protective shipping cage built onto unit
- Type CZ
- 65°C Rise
- 7.5% IMP @ 85° C
- BIL -H.V/L.V 95/30 kV

PRIMARY VOLTAGE TAPS:

Delta High Voltage Connections		Wye High Voltage Connections	
Volts	Amps	Volts	Amps
2,400	842	4,160Y	486
8,320	243	14,400Y	140
7,970	254	13,800Y	146
7,620	265	13,200Y	153
7,200	281	12,470Y	162
6,940	291	12,000Y	169


MEDIUM VOLTAGE TRANSFORMER (CONT'D)

BLUEPRINT & DIMENSIONS:

APPROXIMATE DIMENSIONS:
94.58"W x 139.25"D x 90"H
[2402 x 3537 x 2286 mm]

APPROXIMATE WEIGHT:
21,922 lbs. [9944 kg]

MANUFACTURER:
VANTRAN TRANSFORMERS

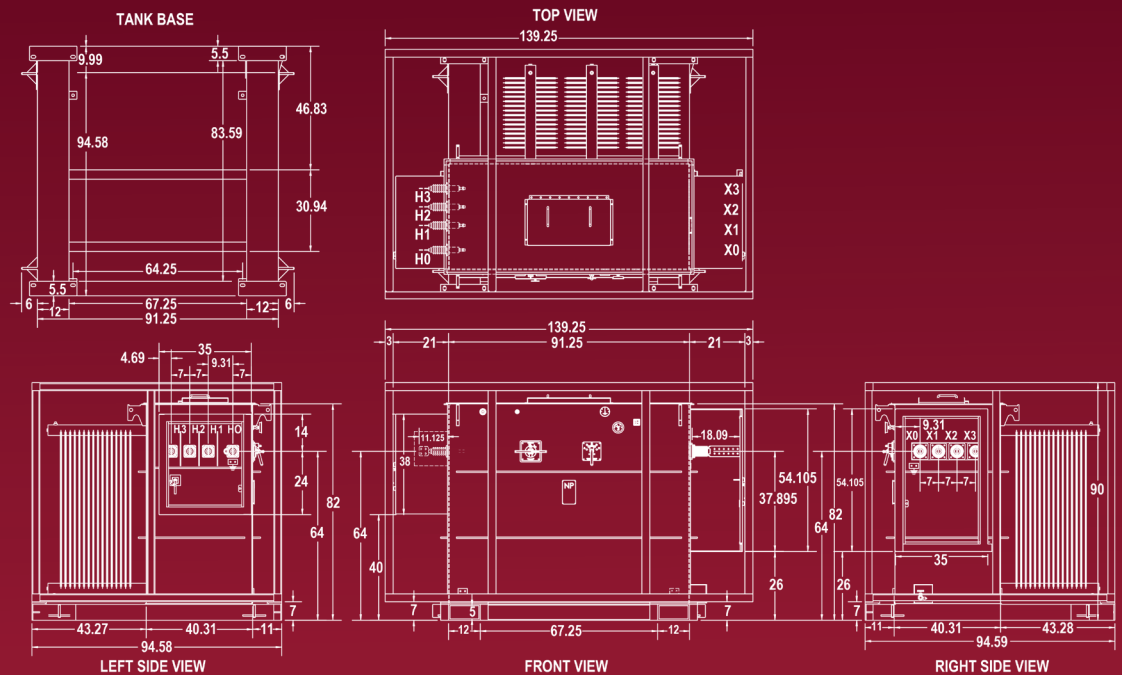

RELATED RENTAL ITEMS:



**MEDIUM VOLTAGE
CABLE**



**LP1000 LOAD
BANK**